

1.
1x torx screwdriver T10
1x plastic mounting wedge

A safer disassembly method is to proceed after removing the switches.



Unscrew the first screw at the bottom of the assembly.



3.
Unscrew the second screw at the bottom of the assembly.



4.
Insert the wedge into the side gap between the top and bottom parts of the assembly at the latch location, pushing it in up to the edge of the latch.



5.
Move the wedge upwards to release the latch.




6.
Repeat the same process for the second latch.



7.
Repeat the same process for the third latch.




8.
Repeat the same process for the fourth latch.

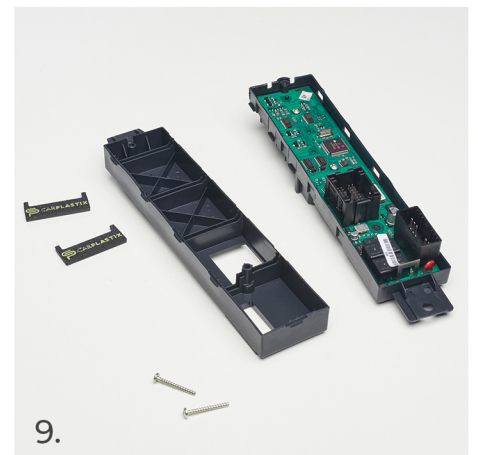


9.
Separate the bottom cover of the assembly.

Using the same method, release all four latches on the other side of the assembly.

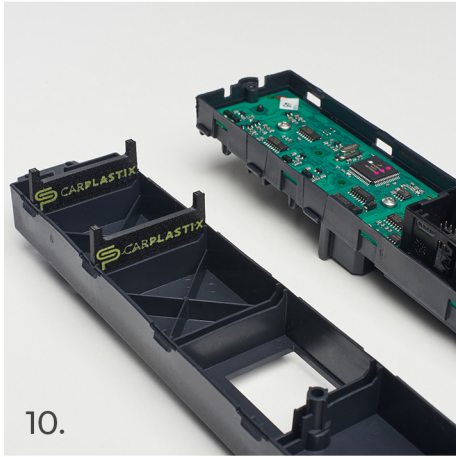


10.

Insert the reinforcements into the first and second gaps above which the switches will be located after assembly.

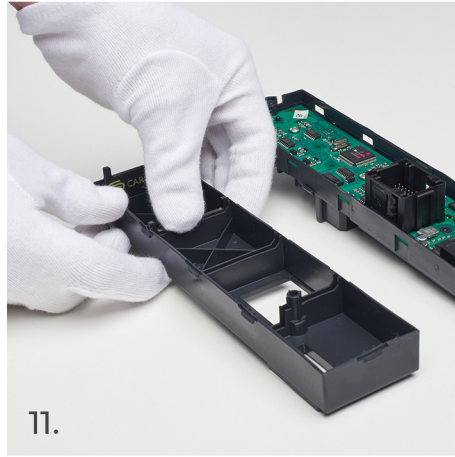


11.

Press firmly and evenly on both ends of the first reinforcement several times to ensure it fits completely into the bottom cover.

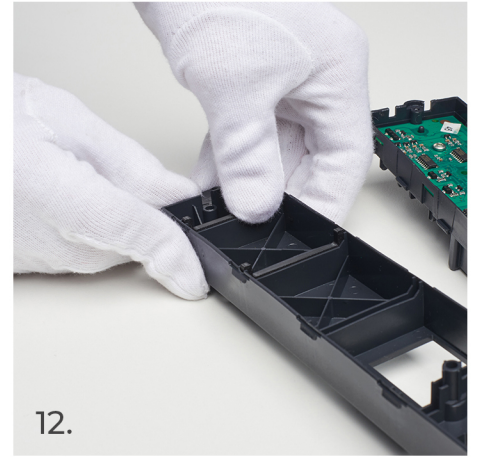

12.

Press firmly and evenly on both ends of the second reinforcement several times to ensure it fits completely into the bottom cover.

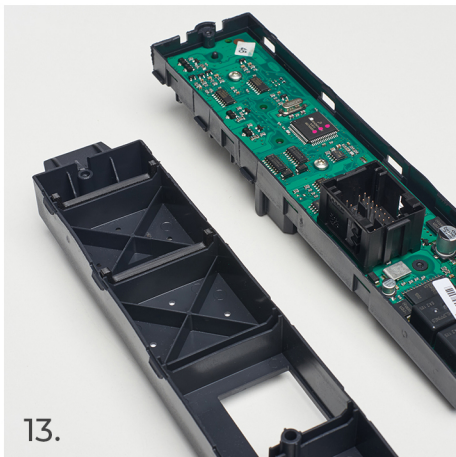

13.

If the reinforcements are inserted as shown in the image, you can snap both parts of the assembly together.



14.

Check that all four latches on both sides of the assembly are properly snapped into place.



15.

Screw the first screw back into the assembly.



16.

Screw the second screw back into the assembly.